

CEDARSHED INSTRUCTIONS

BRISTOL - COLOURSTEEL ROOF

Base size: 3600mm x 2775mm deep

BRISTOL

Tools Required:

- Battery Drill
- Riveter
- Hammer
- Tape Measure
- Ladder
- Skillsaw
- Level
- Screwdriver - Flat
- 3/8 Hex Drive bit
- 8mm Hex Drive bit
- Drill Bit 3.2mm

Before you start:

- Read all instructions carefully.
- Identify all parts and check quantities against checklist.

Safety:

- Do not attempt to build your shed in high winds.
- Beware of sharp edges.
- Protect your eyes and ears.
- Use electric tools with care. Use a Safety Trip Switch.
- It is easier and quicker if this shed is erected by two people.

Select your site:

- Your shed must be level. Achieve this by either levelling the ground or by using blocks.

BRISTOL PARTS LIST

Description	Size	Qty	
PACK ONE - SHED			
Double Doors	895 x 1780	2	<input type="checkbox"/>
Back Wall Panels	1200 x 2057	3	<input type="checkbox"/>
Front Wall Panels	900 x 2057	2	<input type="checkbox"/>
End Wall Panels (L/H)	1342 x 2510	2	<input type="checkbox"/>
End Wall Panels (R/H)	1342 x 2510	2	<input type="checkbox"/>
Door Lintel	287 x 1800	1	<input type="checkbox"/>
Cedar Corner Clashings	65 x 17 x 2082	4	<input type="checkbox"/>
30 x 17 Std Cedarbead	30 x 17 x 2057	3	<input type="checkbox"/>
15 x 17 Std Cedarbead	15 x 17 x 2057	6	<input type="checkbox"/>
30 x 17 Gable Cedarbead	30 x 17 x 2515	2	<input type="checkbox"/>
Roof Truss w/ Brackets	535 x 2775	1	<input type="checkbox"/>
Bargeboards	90 x 17 x 1610	4	<input type="checkbox"/>
Door Stop	45 x 45 x 1800	1	<input type="checkbox"/>
Diamonds	230 x 95 x 17	2	<input type="checkbox"/>
Building Paper	1370 x 12000	1	<input type="checkbox"/>
Roof Sheets	875 x 1570	8	<input type="checkbox"/>
1/2 Roof Sheets	370 x 1570	2	<input type="checkbox"/>
Ridge Flashing	240 x 2010	2	<input type="checkbox"/>
Purlins	70 x 45 x 1858	12	<input type="checkbox"/>
Hardware Pack			
Tek Screws	14G x 75mm, CL4	50	<input type="checkbox"/>
Framing Nails	75 x 3.15mm	60	<input type="checkbox"/>
Bead Nails	50 x 2.5mm	100	<input type="checkbox"/>
Galv Clouts	30 x 2.5mm	120	<input type="checkbox"/>
Colour Rivets	3.2 x 8.2mm	70	<input type="checkbox"/>
Roofing Screws and Washers	50mm	50	<input type="checkbox"/>
Door Handle		1	<input type="checkbox"/>
Door Latch		1	<input type="checkbox"/>
Door Handle Screws	3/16 x 2.5"	2	<input type="checkbox"/>
Silicone Tubes		2	<input type="checkbox"/>
Padbolts		2	<input type="checkbox"/>
Padbolts/Truss Bracket Screws	40mm	12	<input type="checkbox"/>
Instructions		1	<input type="checkbox"/>
Plastic Weatherstrip	50mm x 20mtrs	1	<input type="checkbox"/>
PACK TWO - STIFFENERS (& FLOOR if required)			
Spouting	3716mm	2	<input type="checkbox"/>
Stiffeners	45 x 45 x 3600	2	<input type="checkbox"/>
Floor Joists	70 x 45 x 3590	6	<input type="checkbox"/>
Floorboards	70 x 45 x 2765	24	<input type="checkbox"/>
Flooring Nails	50mm	288	<input type="checkbox"/>

Packed by:

Date: / /



BRISTOL PARTS LIST

Description	Size	Qty	
Deck Option			
Floor Joists	70 x 45 x 3600	2	<input type="checkbox"/>
Floor Joists	70 x 45 x 825	9	<input type="checkbox"/>
Grip Tread Decking	90 x 19 x 3600	10	<input type="checkbox"/>
Floor Joist Nails	90 x 3.15mm	40	<input type="checkbox"/>
Decking Nails	50 x 2.5mm	180	<input type="checkbox"/>
Tek Screws	14G x 100mm	5	<input type="checkbox"/>
Packer H4	30 x 45 x 3600	1	<input type="checkbox"/>
Veranda Option			
Posts (2400mm if supplying Veranda only)	90 x 90 x 2060	2	<input type="checkbox"/>
Veranda Beam	90 x 45 x 3716	1	<input type="checkbox"/>
Veranda Beam	45 x 45 x 3716	1	<input type="checkbox"/>
Veranda Rafters	45 x 45 x 840	3	<input type="checkbox"/>
Roofing Sheets	875 x 1070	4	<input type="checkbox"/>
Roofing 1/2 Sheet	375 x 1070	1	<input type="checkbox"/>
Roofing Screws and Washers	50mm	30	<input type="checkbox"/>
Galv Clouts (Cladding Nails)	30 x 2.5mm	20	<input type="checkbox"/>
Floor Joist Nails	90 x 4.0mm	20	<input type="checkbox"/>
Coach Bolts	M10 x 150mm	4	<input type="checkbox"/>
Tek Screws	14G x 100mm	5	<input type="checkbox"/>
Barge Flashings	1100mm	2	<input type="checkbox"/>
Colour Rivets	3.2 x 8.2mm	10	<input type="checkbox"/>

Packed by:

Date: / /



BRISTOL CONCRETE FLOOR - OPTIONAL

Building a Raised Concrete Base


Step 1: Establish size of shed and excavate sufficient area. Remember to allow for rear roof overhang up to 150mm, and 120mm on each end.

Step 2: Ensure that the base substrate is compacted firmly. We suggest that the slab should be 80mm thick in the middle and 100mm thick around the edges.

Step 3: Lay boxing to the required size, the raised slab size should be 3585 x 2760mm and at least 30mm above the ground line.

Step 4: Lay plastic sheeting if required. Plastic sheeting under slab will prevent moisture coming through from underneath.

Step 5: Pour concrete and screed flush

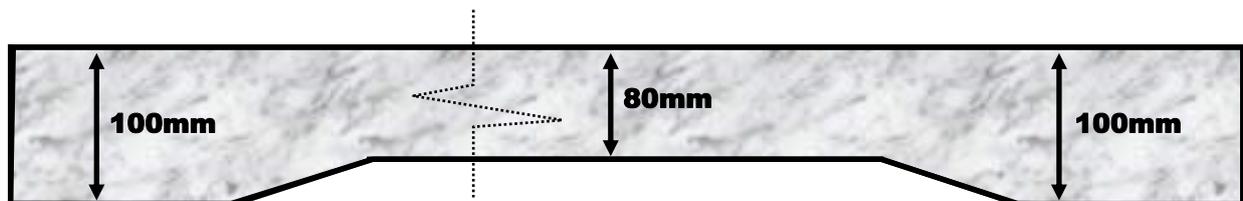


BRISTOL FLOOR - OPTIONAL

Step 1: Lay out floor joists, spacing them evenly as shown. Using 50mm flooring nails, nail a floor board on each end, ensuring ends are flush with joists. Make sure floor is level and joists are supported at 900mm centres.



Step 2: Lay out remaining floor boards. Measure diagonals to ensure measurements are equal (i.e. floor is square). Rip down last floor board to suit gap, and nail off floor with 50mm flooring nails (12 nails per board).

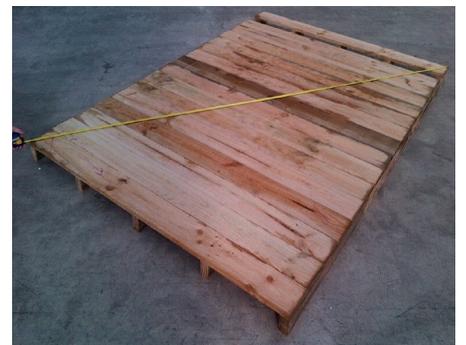


Step 3: Nail plastic weather strip to edge of floor on all four sides, with 30mm clouts, (approx 5 nails per side) ensuring top edge is flush with top of floor. This isn't required if shed is on a concrete base.



Step 4: Unpack panels and identify wall panels and door positions as per plan on following page. Select two panels that go either side of a corner (gable and standard panel) and stand together.



BRISTOL WALL PLAN

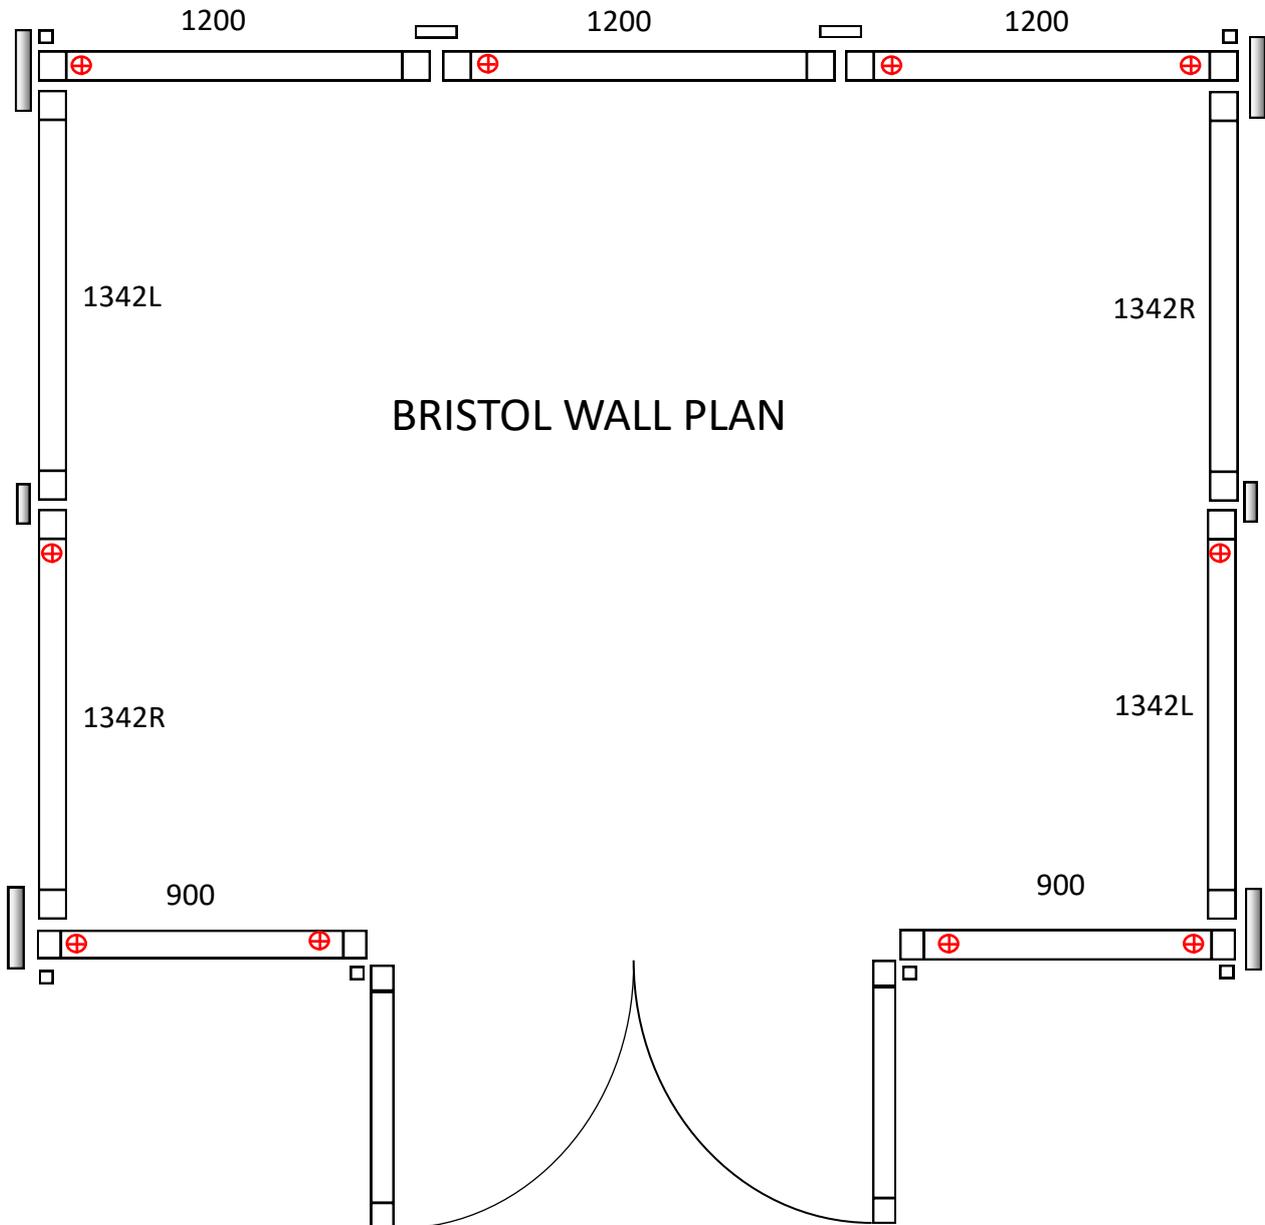


- 15 x 17mm Std Cedar bead □
- 30 x 17mm Std Cedar bead ▬
- 30 x 17mm Gable Cedar bead ▬
- Corner Clashing ▬
- Tek Screws (To secure Walls to Floor) ⊕

Please note: The walls are not screwed down to the floor until all the walls are erected, the roof is in place and the doors are about to be installed.

BRISTOL WALLS

Step 5: Screw wall panels together using 75mm tek screws (3 per panel), ensuring gable wall panels are inside the front and back walls as per the wall plan.

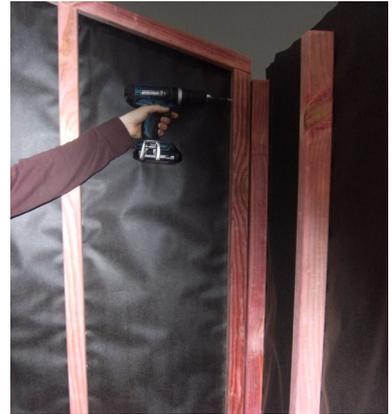

Step 6: Silicone edge of weatherboards on standing panel and nail on cedar beads with 5 x bead nails. (Refer to wall plan for correct beads). Make sure bead is properly sealed to avoid leaks. Note: On standard panels only, top of bead is bevelled to allow for slope of roof.



Step 7: Silicone and nail remaining beads on each panel. Screw panels together using 3 tek screws per join and 4 on the longer joins on gable end panels.



BRISTOL TOP LINTEL

Step 8: Using 4 x 75mm tek screws screw door lintel to studs. Ensure outside cedar weatherboard on lintel is flush with weatherboards each side.

Door Lintel shown from inside



Door Lintel shown from outside.



BRISTOL TOP STIFFENER

Step 9: Using 75mm framing nails, nail both top plate stiffeners into standard wall panels studs, as shown using 2 nails per stud. Ensure ends are flush before nailing.



Step 10: Using 30mm clouts nail top cedar boards to stiffeners (2-3 nails per board). Pre-drill holes to stop boards from splitting.



BRISTOL CORNER CLASHINGS

Step 11: Silicone and nail 15 x 17mm beads on all corners as shown using 5 x 50mm bead nails, per bead.



Step 12: Silicone and nail corner clashings on all corners as shown using 5 x beading nails per clashing.

Silicone both edges of clashing to ensure this doesn't leak.



BRISTOL ROOF

Step 13: Position roof truss in centre of front and back walls. Using 4 x 40mm screws, screw truss to top plate stiffeners, on front and back walls.



Step 14: Position 12 purlins on roof. Top purlins should be together and bottom purlins should be against top plate. Using 75mm framing nails, predrill then nail purlins into top of gable end panels and truss (2 nails per join).



If cabin has the veranda and or deck option, go to step 29 now.

BRISTOL ROOF

Step 15: Ensure shed is square, by measuring diagonals at top corner of wall panels.

Using 30mm clouts, nail building paper on to purlins.

Step 16: Position first full sheet with rib flush with ends of purlins and top of sheet in the centre of roof. (So sheets touch in the middle).

Tack top of the sheet into the top purlin using a 30mm clout through the pan. Using a 50mm Roofing Screw with Washer, screw through the rib into the bottom purlin to a depth of approximately 10mm.

Note. Use 50mm Roofing screws with washers for bottom purlin and 30mm clouts for top purlin. Pre-drill holes for clear roof panels.



Step 17: Lay out remaining full roof sheets and 1/2 sheet. Rivet these sheets together, 2 rivets per joint, to make 1 large roof panel as shown in photo. Tack remaining top corner and bottom corner ensuring edge of sheet is flush with end of purlins and height is correct.



Ensure purlins are straight, Nail through the pan using 30mm clouts into the top purlin, using 50mm roofing screws with washers screw through the rib into the bottom purlin.

Step 18: Rivet ridge flashing to roof on every second rib, as shown.



BRISTOL DOOR

Step 19: Fit 1800mm door stop in doorway.
Check all wall panels are straight and panels either side of doorway are tight against door stop.
Screw panels to floor using 1 x 75mm tek screw per panel. Screw near the panel joins, where possible.

Nail door stop to floor using 75mm framing nails.




Step 20: Fit Right hand door in position as shown.



Step 21: Using 3 x 75mm tek screws, screw door stud to panel ensuring height is correct.
Check that door opens and closes correctly and height is correct.

Hang Left hand door as above.

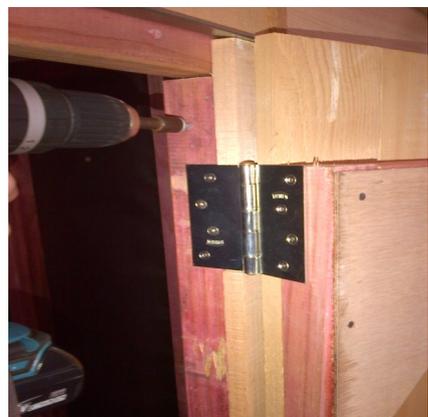

Step 22: Screw padbolt as shown , to the edge of the trailing door, (Left hand door) ensuring padbolt will protrude at least 10mm into Bottom plate in locked position.



BRISTOL DOOR

Step 23: Ensure door is firmly closed, mark the Bottom plate where the padbolt strikes it. Using a 10mm drill bit, drill hole in Bottom Plate.




Step 24: Fasten Top padbolt as per above steps.



Step 25: Photo showing attached padbolts.



Step 26: Fit handle as shown. Attach with 2 x handle screws. Attach and tighten latch to square shaft

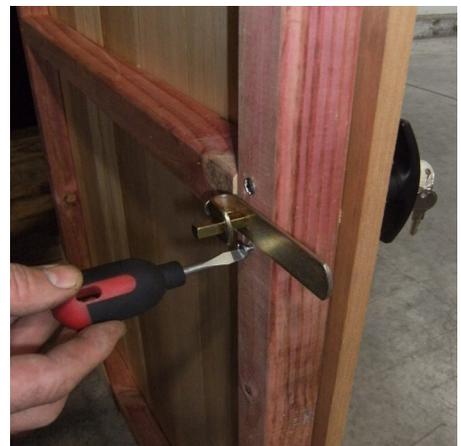

BRISTOL BARGE

Step 27: Attach barges with 2 x 50mm bead nails into each purlin. Nail diamond to barges with 2 x 50mm bead nails.



Step 28: Attach spouting channels to roof, leaving approximately 5mm at each end for water to run off. One rivet through both end ribs, then every second rib between.




Remember to remove all drill filings from your colour steel roof.

Your shed is now complete. You may protect Cedar by staining cedar weatherboards if required.

URBAN DECK AND VERANDA - OPTIONAL

Step 29: Lay out floor joists and assemble sub floor as shown below, nailing sub floor together with 90mm nails. Place 30 x 45mm packer between sub floor and shed floor then attach sub floor to shed floor, with 5 x 100mm tek screws. Check subfloor is level and diagonals are correct before nailing 10 lengths of grip tread to frame using 50mm nails as shown. You may need to rip last length of grip tread to suit.

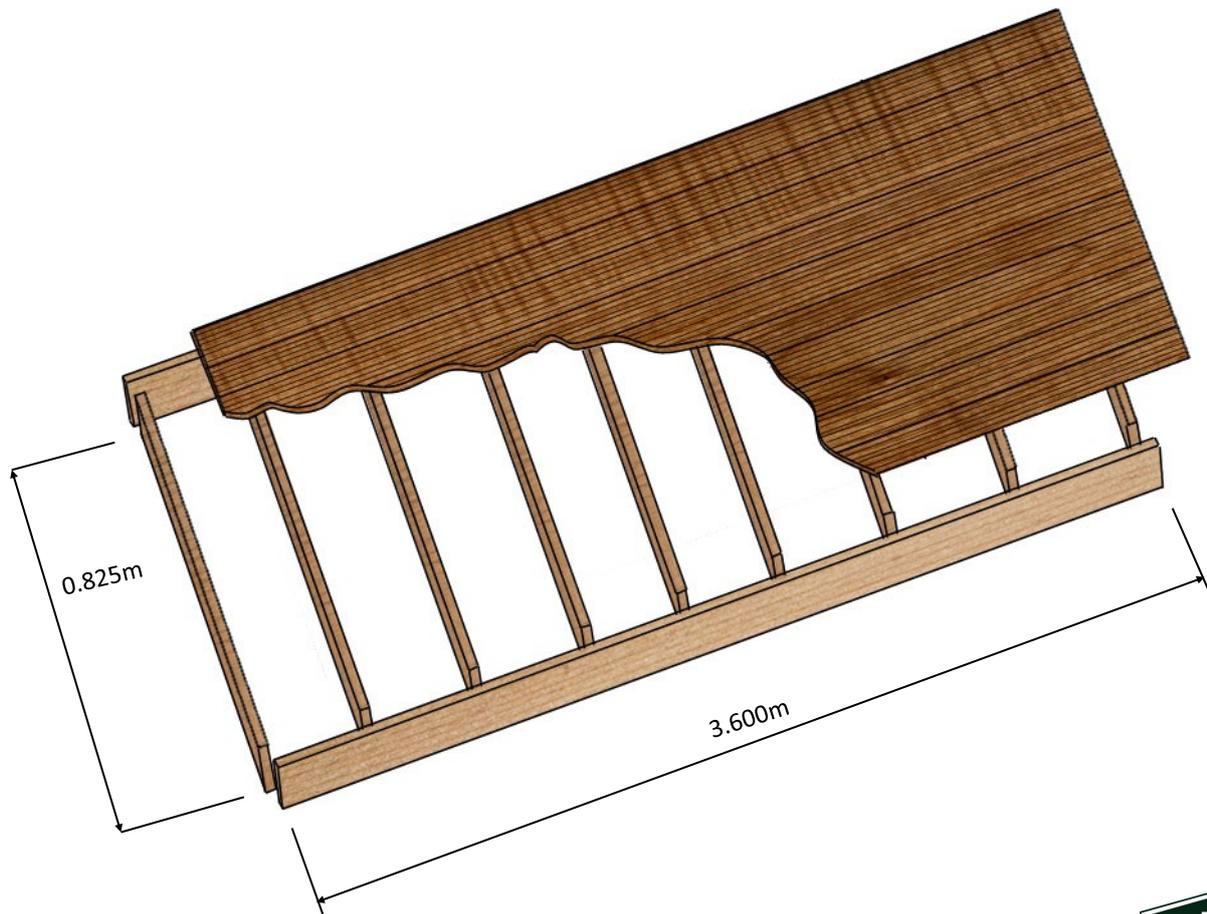

URBAN DECK AND VERANDA - OPTIONAL



Step 30: Nail Veranda beams and rafters together using 2 x 90mm floor joist nails per join.

Note—(90 x 45mm Veranda beam) is 66mm longer than the 45 x 45mm beam.



URBAN DECK AND VERANDA - OPTIONAL

Step 31: Drill and bolt (Using 150mm coach bolts) 2 x 90 x 90 posts to Veranda beam (90 x 45), ensuring top of beam is 10mm above top of posts.

Step 32: Using 5 x 100mm tek screws, screw veranda frame to front of shed ensuring top of veranda frame is 25mm below top of stiff-

Step 33: Ensure posts are straight and bottom of post is level with bottom of deck, drill and bolt, using 150mm coach bolts, posts to front of deck. (500mm in

Step 34: Bend up the top end of pans on roof sheets for added weather protection using roofing pliers. Using 50 Roofing screws, screw veranda roofing sheets to frame, 1 screw per rib on the front beam and 1 clout per pan on the back beam. Start at one end and ensure rib is flush



Continue to nail Cedar shed roof as in step 15. Once shed is finished attach veranda barges and spouting.

CEDAR SHED WARRANTY

GUARANTEE TO CUSTOMER

Congratulations on purchasing a quality New Zealand made Cedar Shed manufactured by Riverlea Group Limited. With proper care and attention this product will offer you many years of use.

WARRANTY ON METAL CLADDING

Your new shed is guaranteed for the benefit of the original purchaser, against defective material or faulty workmanship for **fifteen years** from date of purchase. Riverlea Group Limited will, at its discretion, replace or repair any faulty or defective materials within this time on condition that due care and maintenance has been carried out as detailed below.

TERMS AND CONDITIONS

This warranty does not cover Cedar sheds with steel roofing if it is installed outside the inland corrosion zone or areas where the corrosion rate is more than 200g/m² (as published by BRANZ)

1. The warranty does not cover damage or failure due to improper assembly.
2. This warranty does not cover damage through force majeure or other cause beyond the control of Riverlea Group Limited.
3. This warranty is void if maintenance as detailed below and in the assembly manual has not been adhered to.
4. This warranty does not cover natural variations, expansion, contractions as can be reasonably expected from a timber product.

Painting or coating of your Cedar Shed with a dark colour will cause increased timber temperature and movement which will render this warranty null and void.

Beyond the exclusions above, Riverlea Group Limited will repair or replace the damaged or faulty product. The balance of the original warranty will cover any repaired or replaced material. Riverlea Group Limited will not be liable for any consequential loss or damage, labour or transport costs. All claims must be made within 21 days of discovery.

MAINTENANCE

The following are the minimum maintenance requirements for Cedar Sheds manufactured by Riverlea Group Limited. Please refer to your assembly manual for more details.

Immediately coat all cedar walling cladding with "Endurance Cedar Wall Protector". Cedar walls are to be regularly recoated according to application instructions on the product packaging.

Immediately coat all cedar shingle roofing with "Endurance Cedar Shingle Protector" Cedar shingles are to be regularly recoated according to application instructions on the product packaging.

All steel roofing is to be kept clean and free of debris and washed annually with a hose and soft brush.

Timber floors, where supplied are to be kept out of direct water contact or runoff

The above guidelines will guarantee you a superior Cedar Shed that will offer you many years of outstanding usefulness.

WARRANTY REGISTRATION

Please visit <http://www.riverleagroup.co.nz/warranty-garden-sheds> to validate the Warranty on your shed.

Click on the Warranty Registration Link and complete all details.

If you are unable to access the computer, please phone us on 0800 438 274 and one of the customer services team will help you to activate the warranty on your garden shed.

Many thanks, from the Team at Riverlea Group.

